04 TIE-DOWN STRAPS



SPECIALTY STRAPS

ROLL-OFF CONTAINER STRAPS



	PART NO.	DESCRIPTION	WORKING LOAD LIMIT (LBS)	WEBBING WIDTH / CONTAINER HOOK
	W\$305-CH2	Hook end	5,000	3" WEB (18311)
	WS305-LCH2	Hook & Loop	5,000	3" WEB (18311)
	W\$405-CH4	Hook end	5,500	4" WEB (18312)
	WS405-LCH4	Hook & Loop	5,500	4" WEB (18312)

containers use a securement device.

Government regulations require that all roll-on/roll-off

5FT container strap with CONTAINER HOOK on one end and SEWN LOOP other end

SIDE CURTAIN STRAPS

SIDE CURTAIN STRAP WITH RAVE HOOK • 1-7/8" black polyester strap OC20030-RH 30" STRAP • 1-3/4" STAINLESS STEEL overcenter buckle Working Load Limit: 800LBS (363KGS) OC20036-RH 36" STRAP



WS203-RH - REPLACEMENT CURTAIN STRAP 2" x 36"strap with rave hook Working Load Limit: 800 LBS (363KGS)

RA20024-KM - SIDE CURTAIN STRAP

2" x 24" adjustable end ratchet strap with kev-hole Delta rina. Working Load Limit: 3,335LBS (1,515KGS)

RETRACTABLE TIE-DOWN



RS106-PK2 - 1" X 6' RETRACTABLE TIE DOWN WITH S-HOOK (2 STRAPS - PACK)

SLACKLINE KIT

SLACKLINE KIT



No matter if you are a complete beginner or more experienced slackliner. Easy to use – that's what describes this set the most and that makes it the ideal choice for a beginner in this wonderful





• Ratchet allows loads to be secured with maximum holding force

What is a slackline kit? A slackline kit which contains everything you need to setup

fun • Including all the

1,500 lb. break strength Working Load Limit 500 lbs

• Padded lever for comfort

storage

Power Web Plus webbing resists abrasion

- The kits are user-friendly and easy to use, setup
- The ratchet set tensions easily
- very comfortable to walk on because of the soft 2 inch wide webbing.



- slackline in minutes
- Colours: Yellow, Green, Grey, Red, and Black

HEAVY DUTY STRAPS

OUTLASTS ORDINARY STRAPS, GET "GRIZZLYWEB" STRAPS

Stronger webbing with breaking strength of 6,500lbs/inch High Strength, low elongation polyester webbing More resistant to tears, cuts and abrasions The best for frequent, rugged use.

Extra Protection

Clear plastic overlay to protect the label from wear and tear.



STRAP WIDTH	PART NO.	END HARDWARE	WORKING LOAD LIMIT	STANDARD O/A LENGTH (FT)
2"	RS21830-FXL-GW	2" Flat hook	3,335 LBS	30'
3"	RS31830-F-GW	3" Flat hook	5,000 LBS	30'
4"	RS41830-F-GW	4" Flat hook	5,500 LBS	30'

GRIZZLYWEB



	STRAP WIDTH	PART NO.	END HARDWARE	WORKING LOAD LIMIT	STANDARD O/A LENGTH (FT)
	2"	RS21830-WXL-GW	2" Wire hook	3,335 LBS	30'
ł	NEW 2"	RS21830-WXL1	2" H.D. Wire hook	4,000 LBS	30'
	3"	RS31830-W3-GW	3" Wire hook	6,000 LBS	30'
	4"	RS41830-W-GW	3" Wire hook	6,600 LBS	30'
	6 TO 10				

SP GRIZZLYWEB



STRAP WIDTH	PART NO.	END HARDWARE	WORKING LOAD LIMIT	STANDARD O/A LENGTH (FT)
2"	R\$23330-C-GW	2" Chain anchor	3,335 LBS	30'
3"	R\$33330-C-GW	3" Chain anchor	6,000 LBS	30'
4"	R\$43330-C-GW	4" Chain anchor	6,600 LBS	30'

REFER TO FEDERAL, STATE, PROVINCIAL, INDUSTRY OR LOCAL REGULATIONS FOR PROPER TIE DOWN METHODS. IT IS THE OWNER'S AND USER'S RESPONSIBILITY TO DETERMINE SUITABILITY OF A PRODUCT FOR ANY PARTICULAR USE.

CTS

B

Auto .





ADVANTAGES

- High strength (6,500LBS per inch)
- High Abrasion Resistance
- High UV Resistance
- Low Water Absorption
- Out-of-Service Indicator Lines
- Available in 2", 3" and 4"
- Complies with Cargo Securement (NSC10) and WSTDA Standards.

RATCHET STRAP WITH FLAT HOOK STANDARD FIXED END: 18"

Alternate hardware and custom lengths are available upon request.

RATCHET STRAPS WITH WIRE HOOK

RATCHET STRAP WITH WIRE HOOK STANDARD FIXED END: 18"

Alternate hardware and custom lengths are available upon request.

RATCHET STRAPS WITH CHAIN ANCHOR

RATCHET STRAP WITH CHAIN ANCHOR STANDARD FIXED END: 33"

Alternate hardware and custom lengths are available upon request.

NEVER EXCEED THE WORKING LOAD LIMIT (WLL). LOADS BEYOND ITS WLL CAN RESULT IN SERVERE PERSONAL INJURY OR DEATH.



ware

bing



PART NO.

PART NO.

2" STRAP

WLL.3335 LBS

WINCH STRAPS ත GRIZZLYWEB

WINCH STRAP WITH FLAT HOOK	PART NO.
	2" STRAP WLL.3335 LBS
	WS212-F-GW
malin mali	WS216-F-GW
	WS220-F-GW
WORKING LOAD LIMIT: 2" STRAP - 3,335 LBS (1,515 KGS)	WS225-F-GW
3" STRAP - 5,000 LBS (2,272 KGS)	WS230-F-GW

4" STRAP - 5,500 LBS (2,500 KGS) WINCH STRAP WITH WIRE HOOK



2" STRAP - 3,335 LBS (1,515 KGS) 3" STRAP - 6,000 LBS (2,727 KGS) 4" STRAP - 6,600 LBS (3,000 KGS)

	2" STRAP WLL.3335 LBS	3" STRAP WLL.6000 LBS	4" STRAP WLL.6600 LBS	STRAP LENGTH
	W\$212-W-GW	W\$312-W3-GW	W\$412-W-GW	12 FT
46	W\$216-W-GW	W\$316-W3-GW	W\$416-W-GW	16 FT
	W\$220-W-GW	W\$320-W3-GW	W\$420-W-GW	20 FT
)	W\$225-W-GW	W\$325-W3-GW	W\$425-W-GW	25 FT
)	W\$230-W-GW	W\$330-W3-GW	W\$430-W-GW	30 FT

PART NO.

3" STRAP

WLL.5000 LBS

W\$312-F-GW

WS316-F-GW

W\$320-F-GW

WS325-F-GW

W\$330-F-GW

PART NO.

PART NO.

3" STRAP

WLL.6000 LBS

PART NO.

4" STRAP

WLL.5500 LBS

WS412-F-GW

WS416-F-GW

WS420-F-GW

WS425-F-GW

WS430-F-GW

PART NO.

PART NO.

4" STRAP

WLL.6600 LBS

WS412-D-GW

WS416-D-GW

WS420-D-GW

WS425-D-GW

WS430-D-GW

O/A

STRAP LENGTH

12 FT

16 FT

20 FT

25 FT

30 FT

O/A

O/A

STRAP LENGTH

12 FT

16 FT

20 FT

25 FT

30 FT

WINCH STRAP WITH D RING



WORKING L 2" STRAP - 3 3" STRAP - 6 4" STRAP - 6

	WS212-D-GW	WS312-D-GW
WLL.6,00	WS216-D-GW	WS316-D-GW
OAD LIMIT: 3,335 LBS (1,515 KGS) 3,000 LBS (2,727 KGS) 5,600 LBS (3,000 KGS)	WS220-D-GW	WS320-D-GW
	WS225-D-GW	WS325-D-GW
	W\$230-D-GW	W\$330-D-GW

REFER TO FEDERAL, STATE, PROVINCIAL, INDUSTRY OR LOCAL REGULATIONS FOR PROPER TIE DOWN METHODS. IT IS THE OWNER'S AND USER'S RESPONSIBILITY TO DETERMINE SUITABILITY OF A PRODUCT FOR ANY PARTICULAR USE.

HEAVY DUTY STRAPS WINCH STRAPS **SP GRIZZLYWEB**



a large			
PART NO.	PART NO.	PART NO.	O/A
2" STRAP WLL.3335 LBS	3" STRAP WLL.6000 LBS	4" STRAP WLL.6600 LBS	STRAP LENGTH
W\$212-C-GW	W\$312-C-GW	W\$412-C-GW	12 FT
WS216-C-GW	WS316-C-GW	WS416-C-GW	16 FT
W\$220-C-GW	W\$320-C-GW	W\$420-C-GW	20 FT
W\$225-C-GW	W\$325-C-GW	W\$425-C-GW	25 FT
W\$230-C-GW	W\$330-C-GW	W\$430-C-GW	30 FT
W\$235-C-GW	W\$335-C-GW	W\$435-C-GW	35 FT

GRIZZLYWEB

MIX AND MATCH WITH WINCH STRAP TO MAKE YOUR OWN UNIQUE TIE-DOWN SYSTEMS

WHY REPLACE THE ENTIRE RATCHET STRAP WHEN ALL YOU NEED IS THE SHORT END?

CTS tail ends are offered with a variety of end fittings so you can replace the exact ratchet that you lost or build a custom unit to suit your specific needs.

WARNING

Features:

• 3-ply webbing

- 67% more abrasion resistant
- 30% more resistant to edge cutting

RATCHET TAIL STRAP WITH FLAT HOOK



RATCHET TAIL STRAP WITH WIRE HOOK



RATCHET TAIL STRAP WITH CHAIN ANCHOR



Alternate hardware and custom lengths are available upon request

ALL STRAP ASSEMBLIES OR SYSTEMS ARE AS STRONG AS THEIR WEAKEST COMPONENT INCLUDING THE POINT OF ATTACHMENT. NEVER EXCEED THE WORKING LOAD LIMIT (WLL). LOADS BEYOND ITS WLL CAN RESULT IN SERVERE PERSONAL INJURY OR DEATH.

ŝlings

bing

48

GRIZZLYWEB

WINCH STRAP WITH CHAIN ANCHOR WORKING LOAD LIMIT: 2" STRAP - 3,335LBS (1,515KGS) 3" STRAP - 6,000LBS (2,727KGS) 4" STRAP - 6,600LBS (3,000KGS)

RATCHET TAIL ENDS

• Always protect webbing from sharp edges of load.

• Do not attempt to use strap above rated capacity.

• Do not use strap if there are any signs of cut webbing, heat or chemical damage.

STRAP WIDTH	PART NO.	WORKING LOAD LIMIT	O/A LENGTH
2"	RT218-FXL-GW	3,335 LBS	18"
3"	RT318-F-GW	5,000 LBS	18"
4"	RT418-F-GW	5,500 LBS	18"

STRAP WIDTH	H PART NO. WORKING LOAD		O/A LENGTH
2"	RT218-WXL-GW	3,335 LBS	18"
3"	RT318-W3-GW	6,000 LBS	18"
4"	RT418-W-GW	6,600 LBS	18"

STRAP WIDTH	PART NO.	WORKING LOAD LIMIT	O/A LENGTH
2"	RT233-C-GW	3,335 LBS	33''
3"	RT333-C-GW	6,000 LBS	33''
4"	RT433-C-GW	6,600 LBS	33''



2" TIE-DOWN STRAPS

WINCH STRAPS

All winch straps are made with heavy duty, wear and weather-resistant load control straps,

- dependable hardware to meet the demanding conditions of flatbed operations.
- Complies with National Safety Code Standard 10 Cargo Securement (NSC10) and Web Sling & Tie-down Association Standards (WSTDA).
- Alternate hardware and custom lengths are available upon request.
- These straps are made from minimum breaking strength of 6,000 lbs per inch polyester webbing.
- Colours Available yellow (standard), red, blue, green, grey, white.

WINCH STRAPS, WEBBING B/S: 12,000 LBS

2" WINCH STRAP W/-CHAIN ANCHOR (38162)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY B/S: 10,000 LBS (4,545 KGS)	WS212-C	12 FT	3.2
	WS216-C	16 FT	3.4
	W\$220-C	20 FT	3.6
	W\$225-C	25 FT	3.8
	WS230-C	30 FT	4.0
	W\$225-C	25 FT	3.8

		0011
2" WINCH STRAP W/-FLAT DELTA RING (18512)	PART NO.	O/A STRAP LENGTH
WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY B/S: 10,000 LBS (4,545 KGS)	WS212-D	12 FT
	WS216-D	16 FT
	W\$220-D	20 FT
TTAA U - ATTAIN	W\$225-D	25 FT
I HAWY I:	W\$230-D	30 FT
2" WINCH STRAP W/-FORGED D RING (18512-3)	PART NO.	O/A STRAP LENGTH
WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS)	WS212-D3	12 FT
ASSEMBLY B/S: 10,000 LBS (4,545 KGS)	WS216-D3	16 FT
	W\$220-D3	20 FT
	W\$225-D3	25 FT
	W\$230-D3	30 FT

2" WINCH STRAP W/-FLAT HOOK (18300) WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY B/S: 10,000 LBS (4,545 KGS)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
	WS212-F	12 FT	1.7
	WS216-F	16 FT	1.9
	WS220-F	20 FT	2.1
	WS225-F	25 FT	2.3
	WS230-F	30 FT	2.5

2" WINCH STRAP W/-7/16" WIRE HOOK (18200)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS)	W\$212-W	12 FT	1.7
ASSEMBLY B/S: 10,000 LBS (4,545 KGS)	WS216-W	16 FT	1.9
	W\$220-W	20 FT	2.1
	W\$225-W	25 FT	2.3
	W\$230-W	30 FT	2.5

WEIGHT (LBS)

1.2 1.4 1.6 1.8

2.0

WEIGHT (LBS)

1.7

1.9 2.1 2.3 2.5

2" WINCH STRAP W/-3/8" WIRE HOOK (18202)	PART NO.	O/ A STRAP LENGTH	WEIGHT (LBS)
WORKING LOAD LIMIT: 1,666 LBS (757 KGS)	WS212-W3	12 FT	1.7
ASSEMBLY B/S: 5,000 LBS (2,272 KGS)	WS216-W3	16 FT	1.9
	WS220-W3	20 FT	2.1
O/A = Overall Length, end to end including hook	W\$225-W3	25 FT	2.3
B/S = Breaking Strength	W\$230-W3	30 FT	2.5

Alternate hardware and custom lengths are available upon request

REFER TO FEDERAL, STATE, PROVINCIAL, INDUSTRY OR LOCAL REGULATIONS FOR PROPER TIE DOWN METHODS. IT IS THE OWNER'S AND USER'S RESPONSIBILITY TO DETERMINE SUITABILITY OF A PRODUCT FOR ANY PARTICULAR USE.

2" TIE-DOV

All **CTS** web products have durable labels **SEWN ON ALL** FOUR SIDES and clear plastic overlay protector.

Colours available for 2" w Blue, Yellow (standard) Grey, Red, Green, Black, White, Pink

2" WINCH STRAPS, WEBBING B/S

2" WINCH STRAP W/-GRAB HOOK (38150)



2" WINCH STRAP W/-FLAT SNAP HOOK (18411)



2" WINCH STRAP W/-TWISTED SNAP HOOK (18420



STRAP WINDERS

KEEP WINCH STRAPS ORGANIZED WITH THE STRAP WINDER

The strap winder is a must for any trucker who uses winch straps. The set screw mount allows the unit to attach easily to any standard side rail and conveniently disassemble for storage. Use the strap winder to roll all of your winch straps neatly and quickly so they are ready for use whenever you need them. The strap winder will save you a fortune in time and extend the life of your straps.





ALL STRAP ASSEMBLIES OR SYSTEMS ARE AS STRONG AS THEIR WEAKEST COMPONENT INCLUDING THE POINT OF ATTACHMENT. NEVER EXCEED THE WORKING LOAD LIMIT (WLL). LOADS BEYOND ITS WLL CAN RESULT IN SERVERE PERSONAL INJURY OR DEATH.

Ĕ

2.334

1'212KC

ETTM I



CTS

VN	STRA	PS		
winch	straps:	WORKING LOAD 3335LBS/1515		Safety & Accessories
S: 12	,000 LBS			د ent
	PART NO.	O/ A STRAP LENGTH	WEIGHT (LBS)	Truck Equipment
GS)	W\$212-G	12 FT	2.0	Equ
	WS216-G	16 FT	2.2	es
	W\$220-G	20 FT	2.4	Flatbed Accessories
	W\$225-G	25 FT	2.6	Flatbed scessori
	W\$230-G	30 FT	2.8	Ac
	PART NO.	O/ A STRAP LENGTH	WEIGHT (LBS)	NN S
GS)	WS212-SN1	12 FT	1.7	riedown Straps
GSJ	WS212-SN1	16 FT	1.9	≓″
	WS220-SN1	20 FT	2.1	S
	WS225-SN1	25 FT	2.3	Utility Tiedowns
	WS230-SN1	30 FT	2.5	Utility iedow
	W3250-5111	5011	2.0	-
20)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)	Auto Tiedowns
GS)	WS212-TS	12 FT	1.7	A∪to ⊜dowi
	WS216-TS	16 FT	1.9	Tie
	WS220-TS	20 FT	2.1	5
	WS225-TS	25 FT	2.3	r Vo ucts
	WS230-TS	30 FT	2.5	nterior Van Products
				- - -



92500 STRAP WINDER Weight: 2.4 lbs

Insert strap winder into the

winch cap hole and wind until strap is fully wound. Lock the winch pawl to prevent strap unwinding during travel.

WARNING

- Always protect webbing from sharp edges of load.
- Do not attempt to use strap above rated capacity.
- Do not use strap if there are any signs of cut webbing, heat or chemical damaae
- Hardware strength may be reduced if load path in the area of hardware is not in a straight line.
- Working load requirements should be evaluated by user before selecting appropriate hardware and strap assemblies.
- Remember, all strap assemblies or systems are as strong as its weakest component including the point of attachment.



bing

Webl

2

3" TIE-DOWN STRAPS

3" WINCH STRAP WERRING B/S: 18 000 LBS

/ & orie	3" WINCH STRAP, WEBBING B/S: 18,0	000 LBS				
Safety & Accessorie	3" WINCH STRAP W/-3/8 CHAIN (38163)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)		
S Ac	WORKING LOAD LIMIT: 6,000 LBS (2,727 KGS) ASSEMBLY B/S: 18,000 LBS (8,181 KGS)	W\$312-C	12 FT	5.6		
ŧ	Asternite Figs. 10,000 Ebs (0,101 RGS)	W\$316-C	16 FT	5.9		
a ck	ACCESS OF A	W\$320-C	20 FT	6.2		
Truck Equipment	1000	W\$325-C	25 FT	6.6		
	TOURIER INTO A DECEMBER 1	W\$330-C	30 FT	7.0		
Flatbed Accessories	3" WINCH STRAP W/-5/16" CHAIN (38163-5)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)		
Flatbed scessori	WORKING LOAD LIMIT: 5,000 LBS (2,272 KGS)	W\$312-C\$	12 FT	4.6		
AC C	ASSEMBLY B/S: 15,000 LBS (6,818 KGS)	WS316-CS	16 FT	4.9		
	Cassoss	W\$320-C\$	20 FT	5.2		
N SC	TAA	W\$325-C\$	25 FT	5.6		
Tiedown Straps	BORLES BY CAL	W\$330-C\$	30 FT	6.0		
i≣ S		PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)		
s	3" WINCH STRAP W/-FLAT HOOK (18440)					
Utility Tiedowns	WORKING LOAD LIMIT: 5,000 LBS (2,272 KGS) ASSEMBLY B/S: 15,000 LBS (6,818 KGS)	W\$312-F	12 FT 16 FT	2.6 2.9		
edo	ASSEMIBET B/S. 10,000 EBS (0,010 KGS)	W\$316-F W\$320-F	20 FT	3.2		
Ħ		W\$320-F W\$325-F	20 FT 25 FT	3.2		
S		W\$325-1 W\$330-F	30 FT	4.0		
A∪to ∋down		W3330-1	3011	4.0		
Auto Tiedowns		PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)		
-	3" WINCH STRAP W/-1/2" WIRE HOOK (18201)	W\$312-W	12 FT	2.6		
an Is	WORKING LOAD LIMIT: 5,000 LBS (2,272 KGS) ASSEMBLY B/S: 15,000 LBS (6,818 KGS)	W\$316-W	16 FT	2.9		
Products		W\$320-W	20 FT	3.2		
	1000FB	W\$325-W	25 FT	3.6		
<u> </u>	Provide contraction of the design of the des	W\$330-W	30 FT	4.0		
s		PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)		
Slings	3" WINCH STRAP W/-3" WIRE HOOK (18100)	W\$312-W3	12 FT	3.6		
S	WORKING LOAD LIMIT: 6,000 LBS (2,727 KGS) ASSEMBLY B/S: 18,000 LBS (8,181 KGS)	W\$316-W3	16 FT	3.9		
		W\$320-W3	20 FT	4.2		
ng are	t _ armala	W\$325-W3	25 FT	4.6		
Rigging Hardware		W\$330-W3	30 FT	5.0		
Ri Ha						
đ	3" WINCH STRAP W/-D RING (18513)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)		
Hardware	WORKING LOAD LIMIT: 6,000 LBS (2,727 KGS)	W\$312-D	12 FT	2.6		
ard	ASSEMBLY B/S: 18,000 LBS (8,181 KGS)	W\$316-D	16 FT	2.9		
ž	signal a	W\$320-D	20 FT	3.2		
5		W\$325-D	25 FT	3.6		
bing		W\$330-D	30 FT	4.0		
Webbing		·				
\$		OUTLASTS ORDINA	Y STRAPS, UPGRADE TO	GRIZZLYWE		
_ 5	Colours available for 3" winch straps: Red , Blue , Yellow (standard) O/A = Overall Length, end to end including hook					
nati	B/S = Breaking Strength Alternate hardware and custom lengths are available upon reg					
General Information	WARNING		•	ible opoli request		
luf.	 Hardware strength may be reduced if load path in the Working load requirements should be evaluated by us 		0	d strap assemblies.		
				- + - f - + + + +		

• Remember, all strap assemblies or systems are as strong as its weakest component including the point of attachment.

EB

4" TIE-DOWN STRAPS 4" WINCH STRAP, WEBBING B/S: 24,000 LBS









Alternate hardware and custom lengths are available upon request OUTLASTS ORDINARY STRAPS, UPGRADE TO





ALL STRAP ASSEMBLIES OR SYSTEMS ARE AS STRONG AS THEIR WEAKEST COMPONENT INCLUDING THE POINT OF ATTACHMENT.

52

CTS

REFER TO FEDERAL, STATE, PROVINCIAL, INDUSTRY OR LOCAL REGULATIONS FOR PROPER TIE DOWN METHODS. IT IS THE OWNER'S AND USER'S RESPONSIBILITY TO DETERMINE SUITABILITY OF A PRODUCT FOR ANY PARTICULAR USE.

	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
KGS)		10 57	- 1
	W\$412-C	12 FT	7.1
	WS416-C	16 FT	7.4
	W\$420-C	20 FT	7.7
	W\$425-C	25 FT	8.1
	W\$430-C	30 FT	8.5
	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)

KGS)	WS412-D	12 FT	4.6
	WS416-D	16 FT	4.9
	W\$420-D	20 FT	5.2
	W\$425-D	25 FT	5.6
	W\$430-D	30 FT	6.0

	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
1 0) 0 kgs)	W\$412-F	12 FT	4.6
	WS416-F	16 FT	4.9
	W\$420-F	20 FT	5.2
	W\$425-F	25 FT	5.6
	W\$430-F	30 FT	6.0

00)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
) KGS)	W\$412-W	12 FT	5.1
	WS416-W	16 FT	5.4
	W\$420-W	20 FT	5.7
	W\$425-W	25 FT	6.1
	W\$430-W	30 FT	6.5

O/A = Overall Length, end to end including hook **B/S** = Breaking Strength

Contact your Customer Service Representative for more details.

NEVER EXCEED THE WORKING LOAD LIMIT (WLL). LOADS BEYOND ITS WLL CAN RESULT IN SERVERE PERSONAL INJURY OR DEATH.

ware Webbing



2" RATCHET STRAPS



OUTLASTS ORDINARY STRAPS, UPGRADE TO COGRIZZLYWEB

RS21820-TSL

RS21825-TSL

RS21830-TSL

PART NO.

RS21812-W3S

RS21816-W3S

RS21820-W3S

RS21825-W3S

RS21830-W3S

PART NO.

RS23312-C

RS23316-C

RS23320-C

RS23325-C

WEIGHT (LBS)

> 5.1 5.4 5.7 6.1 6.5

WEIGHT (LBS) 5.1 5.4

5.7

6.1

6.5

WEIGHT

(LBS)

4.6

4.9

5.2

5.6

6.0

WEIGHT

(LBS)

7.6

7.9

8.2

8.6

9.0

9.4

9.8

20 FT

25 FT

30 FT

O/A STRAP

LENGTH

12 FT

16 FT

20 FT

25 FT

30 FT

O/A STRAP

LENGTH

12 FT

16 FT

20 FT

25 FT

All ratchet straps are made with heavy duty, wear and weather-resistant load control straps.

- Complies with National Safety Code Standard 10 Cargo Securement (NSC STANDARD 10)
- and Web Sling & Tie-down Association Standards (WSTDA).
- Alternate hardware and custom lengths are available upon request. • Colours available for 2" ratchet straps: Blue , Yellow (standard) , Grey , Red , Green, White

RATCHET STRAPS, WEBBING B/S: 12,000 LBS

RATCHET STRAPS

Equ	2" RATCHET STRAP W/-7/16 WIRE HOOK (18200+70201)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
ries		RS21812-WXL	12 FT	5.1
esso	ADJUSTABLE END	RS21816-WXL	16 FT	5.4
ACC	OVERALL LENGTH	RS21820-WXL	20 FT	5.7
	WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS)	RS21825-WXL	25 FT	6.1
aps	STANDARD FIXED END LENGTH - 18"	RS21830-WXL	30 FT	6.5

_				
^	2" RATCHET STRAP W/-FLAT HOOK (18300+70201)	PART NO.	O/A STRAP LENGTH	
ns		RS21812-FXL	12 FT	
≷		RS21816-FXL	16 FT	
Đ		RS21820-FXL	20 FT	
s	WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS)	RS21825-FXL	25 FT	
edown	STANDARD FIXED END LENGTH - 18"	RS21830-FXL	30 FT	
0				
Ĭ	2" RATCHET STRAP W/-TWISTED SNAP HOOK (18420+70201)	PART NO.	O/A STRAP LENGTH	
STS		RS21812-TSL	12 FT	
a		RS21816-TSL	16 FT	

WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS) STANDARD FIXED END LENGTH - 18"

WORKING LOAD LIMIT: 1,666 LBS (757 KGS)

STANDARD FIXED END LENGTH - 18"

2" RATCHET STRAP W/-3/8" WIRE HOOK (18202+70203)

ASSEMBLY BREAKING STRENGTH: 5,000 LBS (2,272 KGS)

2" RATCHET STRAP W/-CHAIN ANCHOR (38162+70201)

Slings

54

CTS

WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) RS23330-C 30 FT ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS) RS23335-C 35 FT. STANDARD FIXED END LENGTH - 33" Alternate hardware and custom lengths are available upon request RS23340-C 40 FT.

> REFER TO FEDERAL, STATE, PROVINCIAL, INDUSTRY OR LOCAL REGULATIONS FOR PROPER TIE DOWN METHODS. IT IS THE OWNER'S AND USER'S RESPONSIBILITY TO DETERMINE SUITABILITY OF A PRODUCT FOR ANY PARTICULAR USE.

2" RATCHET

WHY REPLACE THE ENTIRE RATCHET STRAP WHEN ALL YC

CTS tail ends are offered with a variety of end fittings so you suit your specific needs.

WARNING

- Always protect webbing from sharp edges of load.
- Do not attempt to use strap above rated capacity.
- Do not use strap if there are any signs of cut webbing,
- Heat or chemical damage.

REPLACEMENT RATCHET TAIL

RT218-FXL







TL21802-F



TL21802-W



TL23302-C




ALL STRAP ASSEMBLIES OR SYSTEMS ARE AS STRONG AS THEIR W

TAIL STRAPS	
OU NEED IS THE SHORT END? It can replace the exact ratchet that you lost or build a custom unit to 3-PLY WEBBING TAIL END 67% more abrasion resistant	Safety & Accessories
30% more resistant to edge cutting OUTLASTS ORDINARY STRAPS, UPGRADE TO	Truck uipment
ENDS, WEBBING B/S: 12,000 LBS	Eq
2" RATCHET TAIL END W/-FLAT HOOK (18300) AND RATCHET BUCKLE (70201) WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS)	Flatbed Accessorie
Standard Length: 18" Weight: 3.0 lbs Custom lengths are also available.	edown fraps
2" RATCHET TAIL END W/-WIRE HOOK (18200) AND RATCHET BUCKLE (70201)	Ţie S
WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS) Standard Length: 18" Weight: 3.0 lbs	Utility Tiedowns
Custom lengths are also available. 2" RATCHET TAIL END W/-CHAIN ANCHOR (38162) AND RATCHET BUCKLE (70201)	Auto Tiedowns
WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS) Standard Length: 33" Weight: 4.0 lbs Custom lengths are also available.	Interior Van Products
2" TAIL END W/-FLAT HOOK (18300) AND 2" LOOP END	gs
WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS) Standard Length: 18" Weight: 1.0 lbs	Slinç
Custom lengths are also available.	igging Irdware
2" TAIL END W/-WIRE HOOK (18200) AND 2" LOOP END	R S
WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS) ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS) Standard Length: 18" Weight: 1.0 lbs Custom lengths are also available.	Hardware
	bing
2" TAIL END W/-CHAIN ANCHOR (38162) AND 2" LOOP END WORKING LOAD LIMIT: 3,335 LBS (1,515 KGS)	Webbing
ASSEMBLY BREAKING STRENGTH: 10,000 LBS (4,545 KGS) Standard Length: 33" Weight: 2.0 Custom lengths are also available.	General formation
Alternate hardware and custom lengths are available upon request	9 Info
WEAKEST COMPONENT INCLUDING THE POINT OF ATTACHMENT.	55



AND DESCRIPTION OF

3" RATCHET STRAPS

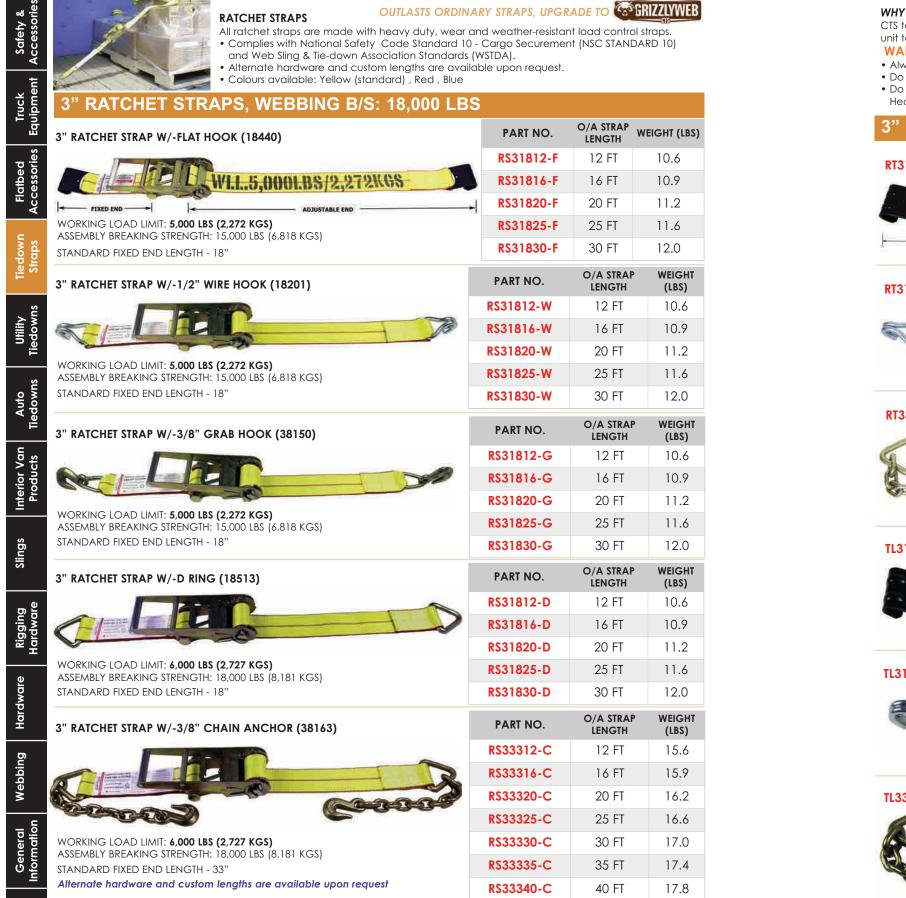

WHY REPLACE THE ENTIRE RATCHET STRAP WHEN ALL YO

CTS tail ends are offered with a variety of end fittings so you unit to suit your specific needs.

WARNING

- Always protect webbing from sharp edges of load.
- Do not attempt to use strap above rated capacity.
- Do not use strap if there are any signs of cut webbing,
- Heat or chemical damage.

3" REPLACEMENT TAIL ENDS, WE







TL31802-F



TL31802-W





ALL STRAP ASSEMBLIES OR SYSTEMS ARE AS STRONG AS THEIR WEAKEST COMPONENT INCLUDING THE POINT OF ATTACHMENT. NEVER EXCEED THE WORKING LOAD LIMIT (WLL). LOADS BEYOND ITS WLL CAN RESULT IN SERVERE PERSONAL INJURY OR DEATH.

REFER TO FEDERAL, STATE, PROVINCIAL, INDUSTRY OR LOCAL REGULATIONS FOR PROPER TIE DOWN METHODS. IT IS THE OWNER'S AND USER'S RESPONSIBILITY TO DETERMINE SUITABILITY OF A PRODUCT FOR ANY PARTICULAR USE.

56

TAIL STRAPS	
OU NEED IS THE SHORT END? I can replace the exact ratchet that you lost or build a custom 3-PLY WEBBING TAIL END	Safety & Accessories
67% more abrasion resistant 30% more resistant to edge cutting OUTLASTS ORDINARY STRAPS, UPGRADE TO BBING B/S: 18,000 LBS	Truck Equipment
3" RATCHET TAIL END W/-FLAT HOOK (18440) AND RATCHET BUCKLE (70300) WORKING LOAD LIMIT: 5,000 LBS (2,272 KGS) ASSEMBLY BREAKING STRENGTH: 15,000 LBS (6,818 KGS)	Flatbed Accessories
Standard Length: 18" Weight: 6.5 lbs Alternate hardware and custom lengths are available upon request 3" RATCHET TAIL END W/-WIRE HOOK (18201) AND RATCHET BUCKLE (70300)	Tiedown Straps
WORKING LOAD LIMIT: 5,000 LBS (2,272 KGS) ASSEMBLY BREAKING STRENGTH: 15,000 LBS (6,818 KGS) Standard Length: 18" Weight: 6.5 lbs	Utility Tiedowns
Alternate hardware and custom lengths are available upon request 3" RATCHET TAIL END W/-3/8" CHAIN ANCHOR (38163) AND RATCHET BUCKLE (70300)	Auto Tiedowns
WORKING LOAD LIMIT: 6,000 LBS (2,727 KGS) ASSEMBLY BREAKING STRENGTH: 18,000 LBS (8,181 KGS) Standard Length: 33" Weight: 10.0 lbs Alternate hardware and custom lengths are available upon request	Interior Van Products
3" TAIL END W/-FLAT HOOK (18440) AND 2" LOOP END WORKING LOAD LIMIT: 5,000 LBS (2,272 KGS) ASSEMBLY BREAKING STRENGTH: 15,000 LBS (6,818 KGS)	Slings
Standard Length: 18" Weight: 1.3 lbs Alternate hardware and custom lengths are available upon request	Rigging Hardware
3" TAIL END W/-WIRE HOOK (18201) AND 2" LOOP END WORKING LOAD LIMIT: 5,000 LBS (2,272 KGS) ASSEMBLY BREAKING STRENGTH: 15,000 LBS (6,818 KGS) Standard Length: 18" Weight: 1.3 lbs	Hardware
Alternate hardware and custom lengths are available upon request 3" TAIL END W/-3/8" CHAIN ANCHOR (38163) AND 2" LOOP END	Webbing
WORKING LOAD LIMIT: 6,000 LBS (2,727 KGS) ASSEMBLY BREAKING STRENGTH: 18,000 LBS (8,181 KGS) Standard Length: 33" Weight: 4.0 lbs	General Information
Alternate hardware and custom lengths are available upon request WEAKEST COMPONENT INCLUDING THE POINT OF ATTACHMENT. ND ITS WILL CAN RESULT IN SERVERE PERSONAL INJURY OR DEATH.	57



4" RATCHET STRAPS



t

Ē

ruck

RATCHET STRAPS

OUTLASTS ORDINARY STRAPS, UPGRADE TO STRIZZLYWEB

- All ratchet straps are made with heavy duty, wear and weather-resistant load control straps. Complies with National Safety Code Standard 10 Cargo Securement (NSC10)

- and Web Sling & Tie-down Association Standards (WSTDA). Alternate hardware and custom lengths are available upon request. Colours available: Yellow

4" RATCHET STRAPS, WEBBING B/S: 24,000 LBS

4" RATCHET STRAP W/-4" CHAIN ANCHOR (38164)

Accessories		OI.BS/3,000KG		
Straps	OVERALL LENGT	H		
St	WORKING LOAD LIMIT: 6,600 LBS (3,000 KGS)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
	ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS) STANDARD FIXED END LENGTH - 33''	R\$43312-C	12 FT	18.6
Tiedowns	WARNING	RS43316-C	16 FT	18.9
liedo	 Hardware strength may be reduced if load path in the area of hardware is not in a straight line. Wardware load area incompare should be avaluated by user before selecting. 	RS43320-C	20 FT	19.2
	 appropriate hardware and strap assemblies. Remember all strap assemblies or systems are as strong as 	R\$43325-C	25 FT	19.6
	its weakest component including the point of attachment.	RS43330-C	30 FT	20.0

Auto Tiedown	is weakest component including the point of dirachment.	RS43330)-C	30	FT	20.0
A Tied	4" RATCHET STRAP W/-FLAT HOOK (18310)		PAR	NO.	O/A STRAP LENGTH	WEIGHT (LBS)
Van cts			RS41	812-F	12 FT	14.6
Interior Van Products			RS41	816-F	16 FT	14.9
P T			RS41	820-F	20 FT	15.2
10	WORKING LOAD LIMIT: 5,500 LBS (2,500 KGS) ASSEMBLY BREAKING STRENGTH: 16,500 LBS (7,500 KGS)		RS41	825-F	25 FT	15.6
STANDARD FIXED END LENGTH - 18"	RS41830-F		830-F	30 FT	16.0	
	4" RATCHET STRAP W/-WIRE HOOK (18100)		PART	NO.	O/A STRAP LENGTH	WEIGHT (LBS)
ging Iwar			RS418	1 2-W	12 FT	14.6
Rigging Hardware		To	RS418	316-W	16 FT	14.9
	WORKING LOAD LIMIT: 6,600 LBS (3,000 KGS)		RS418	20-W	20 FT	15.2
Hardware	ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS)		RS418	25-W	25 FT	15.6
Hard	STANDARD FIXED END LENGTH - 18"		RS418	30-W	30 FT	16.0
_					O /A STRAR	WEIGHT

4" RATCHET STRAP W/-D RING (18514)	PART NO.	O/A STRAP LENGTH	WEIGHT (LBS)
	RS41812-D	12 FT	14.6
5	RS41816-D	16 FT	14.9
WORKING LOAD LIMIT: 6,600 LBS (3,000 KGS) ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS) STANDARD FIXED END LENGTH - 18''	RS41820-D	20 FT	15.2
	RS41825-D	25 FT	15.6
WORKING LOAD LIMIT: 6,600 LBS (3,000 KGS) ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS) STANDARD FIXED END LENGTH - 18"	RS41830-D	30 FT	16.0

4" RATCHET

WHY REPLACE THE ENTIRE RATCHET STRAP WHEN ALL YO

CTS tail ends are offered with a variety of end fittings so you to suit your specific needs.

WARNING

- Always protect webbing from sharp edges of load.
- Do not attempt to use strap above rated capacity.
- Do not use strap if there are any signs of cut webbing, Heat or chemical damage.

4" REPLACEMENT TAIL ENDS, WE















58

Š

TAIL STRAPS	
OU NEED IS THE SHORT END? can replace the exact ratchet that you lost or build a custom unit 3-PLY WEBBING TAIL END	Safety & Accessories
. 67% more abrasion resistant . 30% more resistant to edge cutting OUTLASTS ORDINARY STRAPS, UPGRADE TO BBING B/S: 24,000 LBS	Truck Equipment
4" RATCHET TAIL END W/-FLAT HOOK (18310) AND RATCHET BUCKLE (70400) WORKING LOAD LIMIT: 5,500 LBS (2,500 KGS) ASSEMBLY BREAKING STRENGTH: 16,500 LBS (7,500 KGS)	Flatbed Accessories
Standard Length: 18" Weight: 9.0 lbs Custom lengths are also available. 4" RATCHET TAIL END W/-WIRE HOOK (18100)	Tiedown Straps
AND RATCHET BUCKLE (70400) WORKING LOAD LIMIT: 6,600 LBS (3,000 KGS) ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS) Standard Length: 18" Weight: 9.0 lbs Custom lengths are also available.	Utility Tiedowns
4" RATCHET TAIL END W/-CHAIN ANCHOR (38164) AND RATCHET BUCKLE (70400)	Auto Tiedowns
WORKING LOAD LIMIT: 6,600 LBS (3,000 KGS) ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS) Standard Length: 33" Weight: 11.0 lbs Custom lengths are also available.	Interior Van Products
4" TAIL END W/-FLAT HOOK (18310) AND 2" LOOP END WORKING LOAD LIMIT: 5,500 LBS (2,500 KGS) ASSEMBLY BREAKING STRENGTH: 16,500 LBS (7,500 KGS)	Slings
Standard Length: 18" Weight: 3.0 lbs Custom lengths are also available.	Rigging Hardware
4" TAIL END W/-WIRE HOOK (18100) AND 2" LOOP END WORKING LOAD LIMIT: 6,600 LBS (3,000 KGS) ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS) Standard Length: 18" Weight: 3.0 lbs Custom lengths are also available.	Hardware
4" TAIL END W/-CHAIN ANCHOR (38164) AND 2" LOOP END WORKING LOAD LIMIT: 6,600 LBS (3,000 KGS) ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS)	Webbing
ASSEMBLY BREAKING STRENGTH: 20,000 LBS (9,090 KGS) Standard Length: 33" Weight: 5.0 lbs Custom lengths are also available. hardware and custom lengths are available upon request	General Information
WEAKEST COMPONENT INCLUDING THE POINT OF ATTACHMENT.	59

NEVER EXCEED THE WORKING LOAD LIMIT (WLL). LOADS BEYOND ITS WLL CAN RESULT IN SERVERE PERSONAL INJURY OR DEATH.

ENDLESS RATCHET STRAPS

ENDLESS RATCHET STRAPS

Safety & Accessories	ENDLESS RATCHET STRAPS				
Safety & ccessorie	2" ENDLESS RATCHET STRAP (LIGHT DUTY)	PART NO.	STRAP LENGTH	WEIGHT (LBS)	
Ă		ER212-LD	12 FT	2.4	
ent	Ratchet buckle: 70244 Webbing: 6,000 lbs	ER216-LD	16 FT	2.5	
Truck Equipment	Colors: Grey/Black/yellow	ER220-LD	20 FT	2.6	
Equ	WORKING LOAD LIMIT: 1,500 LBS (663 KG ASSEMBLY B/S: 5,000 LBS (2,000 KGS)		25 FT	2.8	
es		ER230-LD	30 FT	3.0	
Flatbed Accessories	2" ENDLESS RATCHET STRAP	PART NO.	STRAP LENGTH	WEIGHT (LBS)	
AC	Ratchet buckle: 70203 (short handle)	ER212-S	12 FT	3.4	
c	Webbing: 12,000 lbs Standard color: Yellow	ER216-S	16 FT	3.5	
Tiedown Straps		ER220-S	20 FT	3.6	
Str	WORKING LOAD LIMIT: 3,335 LBS (1,515 K ASSEMBLY B/S: 10,000 LBS (4,545 KGS)	ER225-S	25 FT	3.8	
	WU	ER230-S	30 FT	4.0	
Utility Tiedowns	2" ENDLESS RATCHET STRAP	PART NO.	STRAP LENGTH	WEIGHT (LBS)	
U Tiea		ER212-M	12 FT	3.4	
	Ratchet buckle: 70202 (medium hand Webbing: 12,000 lbs	ER216-M	16 FT	3.5	
Auto Tiedowns	Standard color: Yellow	ER220-M	20 FT	3.6	
Auto iedowi	WORKING LOAD LIMIT: 3,335 LBS (1,515 K ASSEMBLY B/S: 10,000 LBS (4,545 KGS)	GS) ER225-M	25 FT	3.8	
		ER230-M	30 FT	4.0	
Van cts					
Interior Van Products	2" ENDLESS RATCHET STRAP	PART NO.	STRAP LENGTH	WEIGHT (LBS)	
Pr	Ratchet buckle: 70201 (long handle		12 FT	3.4	
	Webbing: 12,000 lbs Standard color: Yellow	ER216-XL	16 FT	3.5	
ngs	WORKING LOAD LIMIT: 3,335 LBS (1,515 I	ER220-XL	20 FT	3.6	
Slin	ASSEMBLY B/S: 10,000 LBS (4,545 KGS)	ER225-XL	25 FT	3.8	
		ER230-XL	30 FT	4.0	
Rigging Hardware	3" ENDLESS RATCHET STRAP	PART NO.	STRAP LENGTH	WEIGHT (LBS)	
ar	5 ENDELSS RAICHEI STRAT	PARTINO.			
ŤŤ		ER312	12 FT	7.9	
	Ratchet buckle: 70300		12 FT 16 FT	7.9 8.1	
		ER312			
	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs Standard color: Yellow	ER312 ER316 ER320	16 FT	8.1	
Hardware H	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs	ER312 ER316 ER320	16 FT 20 FT	8.1 8.4	
Hardware	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 6,000 LBS (2,727 K	ER312 ER316 ER320 ER325	16 FT 20 FT 25 FT	8.1 8.4 8.7 9.0	
	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 6,000 LBS (2,727 K ASSEMBLY B/S: 18,000 LBS (8,181 KGS)	ER312 ER316 ER320 ER325 ER330	16 FT 20 FT 25 FT 30 FT	8.1 8.4 8.7 9.0	
Webbing Hardware	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 6,000 LBS (2,727 K ASSEMBLY B/S: 18,000 LBS (8,181 KGS) 4" ENDLESS RATCHET STRAP	ER312 ER316 ER320 ER325 ER330 PART NO.	16 FT 20 FT 25 FT 30 FT STRAP LENGTH	8.1 8.4 8.7 9.0 WEIGHT (LBS)	
Webbing Hardware	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 6,000 LBS (2,727 K ASSEMBLY B/S: 18,000 LBS (8,181 KGS) 4" ENDLESS RATCHET STRAP Ratchet buckle: 70400 Grizzly Webbing: 26,000 lbs Standard color: Yellow	ER312 ER316 ER320 ER325 ER330 PART NO. ER412 ER416 ER420	16 FT 20 FT 25 FT 30 FT STRAP LENGTH 12 FT	8.1 8.4 9.0 WEIGHT (LBS) 9.9	
Webbing Hardware	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 6,000 LBS (2,727 K ASSEMBLY B/S: 18,000 LBS (8,181 KGS) 4" ENDLESS RATCHET STRAP	ER312 ER316 ER320 ER325 ER330 PART NO. ER412 ER416 ER420	16 FT 20 FT 25 FT 30 FT STRAP LENGTH 12 FT 16 FT	8.1 8.4 9.0 WEIGHT (LBS) 9.9 10.1	
Hardware	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 6,000 LBS (2,727 K ASSEMBLY B/S: 18,000 LBS (8,181 KGS) 4" ENDLESS RATCHET STRAP Ratchet buckle: 70400 Grizzly Webbing: 26,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 8,000 LBS (3,636 H	(GS) ER312 ER316 ER320 ER325 ER330 PART NO. ER412 ER416 ER420	16 FT 20 FT 25 FT 30 FT STRAP LENGTH 12 FT 16 FT 20 FT	8.1 8.4 9.0 WEIGHT (LBS) 9.9 10.1 10.4	
Webbing Hardware	Ratchet buckle: 70300 Grizzly Webbing: 20,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 6,000 LBS (2,727 K ASSEMBLY B/S: 18,000 LBS (8,181 KGS) 4" ENDLESS RATCHET STRAP Ratchet buckle: 70400 Grizzly Webbing: 26,000 lbs Standard color: Yellow WORKING LOAD LIMIT: 8,000 LBS (3,636 H ASSEMBLY B/S: 24,000 LBS (10,909 KGS)	ER312 ER316 ER320 ER325 ER330 PART NO. ER412 ER416 ER420 ER425	16 FT 20 FT 25 FT 30 FT STRAP LENGTH 12 FT 16 FT 20 FT 25 FT	8.1 8.4 9.0 WEIGHT (LBS) 9.9 10.1 10.4 10.7	

REFER TO FEDERAL, STATE, PROVINCIAL, INDUSTRY OR LOCAL REGULATIONS FOR PROPER TIE DOWN METHODS. IT IS THE OWNER'S AND USER'S RESPONSIBILITY TO DETERMINE SUITABILITY OF A PRODUCT FOR ANY PARTICULAR USE.

<u>CTS</u>